

1357

“ePTFE/Graphite and durable Aramid”

1357 combines ePTFE/Graphite yarn with yellow Aramid.

Combining these two yarns provides heat dissipation, prevents shaft scoring, and chemical compatibility with most fluids.

Construction: Interwoven braid.


Temperature Range: 450° F

pH Range: 3-11

Pressure: 500 PSI

Shaft Speed: 2,700 FPM

Service: Typical applications would light slurry (gritty & abrasive) media. ePTFE/Graphite provides sealability and heat dissipation without scoring the shaft, while the aramid adds strength and durability.

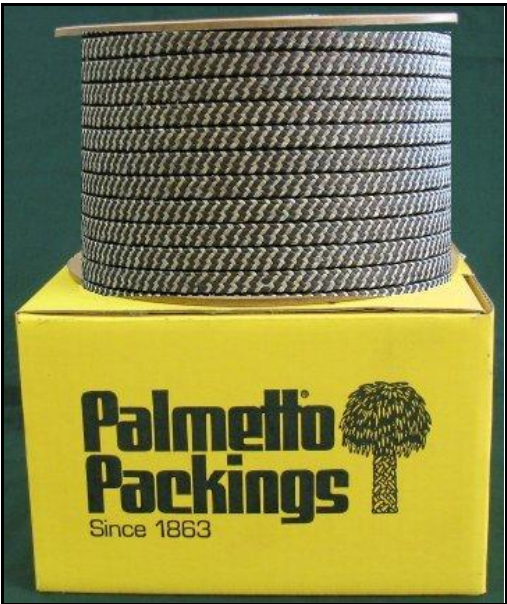

When ordering, please specify style, size, quantity and packaging desired.

Size	in	1/8"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"
	mm	3,20	4,80	6,40	7,90	9,50	11,10	12,70	14,30	15,90	17,50	19,10	20,60	22,20	23,80	25,40
Length	ft/lb															
	m/kg															