

## 1607

*“Flax packing with added graphite and lubrication”*

Premium Grade, high tensile strength flax fiber, impregnated throughout with petroleum base lubricant/wax/graphite. The viscous grease is engineered to leach out of the packing upon an increase in frictional heat. This lubricant release will lower frictional heat which automatically reduces the release of internal lubricant. The self adjusting flow of internal lubricant increases packing and sleeve life.

**Construction:** Interwoven braid.


**Temperature Range:** 210° F

**pH Range:** 6-8

**Pressure:** 250 PSI

**Shaft Speed:** 2,500 FPM

**Service:** Economical general service packing for applications not requiring a wide pH range.

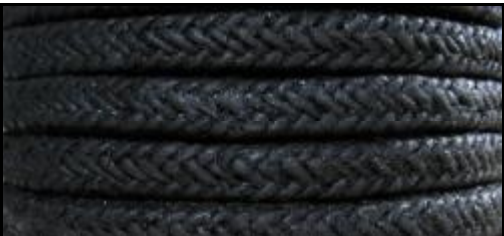

When ordering, please specify style, size, quantity and packaging desired.

Size	in	1/8"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"
	mm	3,20	4,80	6,40	7,90	9,50	11,10	12,70	14,30	15,90	17,50	19,10	20,60	22,20	23,80	25,40
Length	ft/lb															
	m/kg															